

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G02B 6/26, 6/293, H04J 14/02		A1	(11) International Publication Number: WO 00/29886
			(43) International Publication Date: 25 May 2000 (25.05.00)
(21) International Application Number: PCT/US99/26877 (22) International Filing Date: 12 November 1999 (12.11.99) (30) Priority Data: 60/108,358 13 November 1998 (13.11.98) US (71) Applicant (for all designated States except US): CALIFORNIA INSTITUTE OF TECHNOLOGY [US/US]; 1200 East California Boulevard, Mail Stop 201-85, Pasadena, CA 91125 (US). (72) Inventors; and (73) Inventors/Applicants (for US only): VAHALA, Kerry [US/US]; California Institute of Technology, Mail Code 128-95, Pasadena, CA 91125 (US). CAI, Ming [US/US]; California Institute of Technology, Mail Code 128-95, Pasadena, CA 91125 (US). HUNZIKER, Guido [US/US]; California Institute of Technology, Mail Code 128-95, Pasadena, CA 91125 (US). (74) Agent: HARRIS, Scott, C.; Fish & Richardson P.C., Suite 1400, 4225 Executive Square, La Jolla, CA 92037 (US).		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published With international search report.	

(54) Title: RESONATOR FIBER BIDIRECTIONAL COUPLER

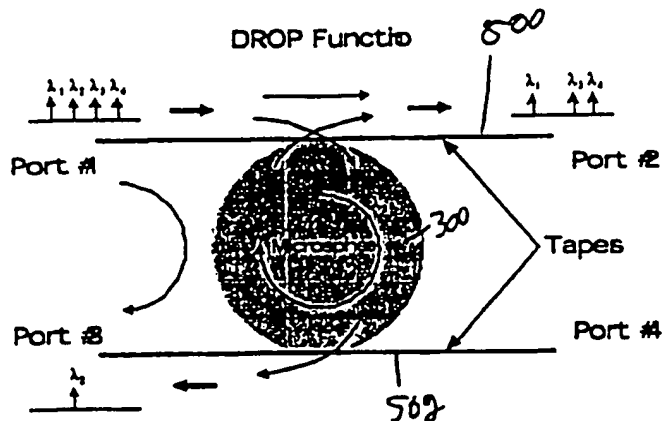


Illustration of the drop function in the present invention.

(57) Abstract

A resonator (300), e.g., a silica microsphere or disk, is used between two fiber optic cables (500, 502) to form an add/drop filter. The resonator (300) is resonant with the frequency to be added or dropped. In this way, only that particular channel is added or dropped as needed.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LJ	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

Description

5

10

15

20

25

30

35

40

45

50

55

5

RESONATOR FIBER BIDIRECTIONAL COUPLER

10

Cross Reference To Related Applications

5

15

This claims priority from US Provisional Application,
number 60/108,358, filed November 13, 1998.

20

Background

10

25

30

15

35

40

20

45

50

55

Modern fiber-optic communications systems use a method called wavelength division multiplexing or WDM to send massive amounts of information at extremely high data rates over a single optical fiber. In these WDM systems there are many optical wavelengths (also called optical channels) that are used to carry the information. The optical power at each of these wavelengths co-propagates with the power at the other wavelengths on a single optical fiber cable. At certain points along the optical fiber, it may be necessary to remove and/or add an optical channel. This can happen, for example, in a long-distance communication system whenever the fiber cable enters a city. It can also happen within a city (or metropolitan area network) when optical channels are routed by using their wavelength. Devices that perform this function are called add/drop filters.

5

10

15

20

The general principle of these devices is illustrated in Figures 1 and 2. Figure 1 illustrates the properties of the drop function. A wavelength division multiplexed signal 100 is introduced to the #1 port 102 of the add/drop filter 104. A designated wavelength, here λ_1 , is intended to be dropped. The dropped wavelength λ_1 will be output through port #3 106. The remainder of the spectrum, that is λ_1 , λ_2 , and λ_3 , will be output through the #2 output port 110.

25

30

The add function of the add/drop filter is illustrated in Figure 2. The partial spectrum, λ_1 , λ_2 , λ_3 , is input as input wave 200 (to #1 port). The wavelength to be added, λ_4 , is input through #4 port 202. The complete spectrum with all of λ_1 - λ_4 is output through #2 output port 210.

35

40

45

50

Several different kinds of add/drop filter devices have been proposed. Of these approaches one that is most nearly related to this invention is described in "Ultracompact Si-SiO₂ Micro-Ring Resonator Optical Channel Dropping Filters", by Little et al (herein "Little"). In that approach, two waveguides are prepared on a wafer using lithography and etching techniques. These waveguides are situated on opposite sides of a disk that has also been defined using lithography and etching. The disk is designed to sustain optical modes characterized by their resonant wavelength and their quality factors or "Q". The positions of the waveguides permit

55

5 coupling of optical power between the waveguides and the disk.
When the wavelength of this optical power coincides with a
10 resonant wavelength of the disk, optical power can be
transferred between the waveguides. This permits realization
5 of the add/drop function.

15 The Little reference describes a monolithic add-drop
device where key components of the device are fabricated onto
a single semiconductor chip. Devices like these have several
20 limitations. First, because the Little device is fabricated
as waveguides and other parts on a chip, the waveguides and
10 the disk resonator are etched or otherwise defined into the
chip. Although fabrication of this kind of monolithic-
25 optical-element lends itself well to mass production, it has
drawbacks. There can be a large insertion loss associated
30 with coupling any waveguide created on a wafer to optical
fiber. Several undesirable decibels of loss are typical for
15 the fiber-to-chip coupling. Also, the manufacturing process
that couples optical fibers to on-chip waveguides is costly.
35 Hence, the cost associated with producing fiber-coupled
devices such as in the Little reference can be high. Another
40 disadvantage of the Little device is parasitic optical loss
induced during the fabrication process, because of unwanted
45 optical scattering from imperfections at lithographic-defined
interfaces. Such loss can adversely affect propagation through
50

5 the device as well as the quality factor or Q of the resonator.

10 The optical Q is a figure of merit often cited in optical resonators and provides a reference point as to the quality of
5 a resonator. The optical Q or quality factor of a resonator mode is defined as $Q = \nu / \Delta \nu$ where ν is the optical frequency of
15 the given mode while $\Delta \nu$ is the modes linewidth. The Q's of the resonators of the present invention can exceed 1 million.
20 High Q is not only important in establishing a basis for comparison of resonator quality, but also affects the way in
10 which the add/drop device functions. In general, higher Q resonators can provide more flexibility in design, and can
25 allow for a wider range of system applications - even beyond the application cited above to add/drop filters.

15

35 Summary

The present system teaches a special kind of resonator-based all-fiber optic bi-directional coupler in which optical
40 power is resonantly transferred from a first optical fiber to a second or vice versa by way of coupling to a high-Q optical
20 cavity. One application is to wavelength-division-multiplexed optical communications systems where a version of the device
45 can function as an add/drop filter. Another application would

50

55

5

use the ultra-high Q properties of the filter for high-resolution optical spectrum analysis.

10

5

15

20

10

25

30

35

40

45

50

55

5

Brief Description of the Drawings

10

These and other aspects of the invention will now be described with reference to the attached drawings and photographs, in which:

15

Figures 1 & 2 respectively show a standard drop and add filter;

20

Figures 3 & 4 respectively show a drop and add filter function according to an embodiment;

10

Figure 5 shows a high magnification photograph of the device;

25

Figure 6 shows an experimental frequency response of the device in Figure 5; and

30

Figure 7 shows a tunable embodiment using multiple resonators;

Description of the Preferred Embodiments

35

The inventors recognize that wavelength add and drop filters should have certain desirable characteristics. These desirable characteristics include the following:

40

45

The device should have a high drop extinction. This means that the device should produce minimal residual optical power in the place of the now-dropped channel, at the output port. This is important since any such residual information could interfere with new information that would be added in the available wavelength slot.

50

55

5

10

15

The device should have very high rejection of non-designated channels. These non-designated channels should not be coupled into the drop port (port No. 3) or to the add port (port no. 4). There should be low insertion loss of non-designated channels, i.e., there should be minimal attenuation of the wavelengths that are not dropped by the device.

20

The channels that are to be dropped or added should also be minimally attenuated by the drop and/or add process.

10

In some applications, the specific channels to be added or dropped should be programmable.

25

30

15

The device should also be easy and inexpensive to couple to an optical fiber. Ideally, the add/drop device could, itself, be composed of optical fiber so that expensive packaging procedures associated with coupling the device to fiber could be avoided.

35

40

The optical pass bandwidth of the add/drop device must be greater than or equal to the spectral width of the optical channel. Otherwise information on the channel will be lost, distorted or attenuated.

20

45

An embodiment describes a device that can be made from all fiber optic materials and which has substantial advantages.

50

According to the present system, a resonator, e.g., a microsphere or disk shaped resonator, is coupled to two,

55

5 single-mode optical fibers which have been prepared with
optical tapers. The resonator can be disk shaped, spherical
10 or spheroidal (e.g., a squashed sphere). The tapered fibers
can be prepared by heating a portion of the fiber in a flame.
5 Other techniques of forming such tapers are known. The fiber
15 taper is preferably thin enough so that the light wave may be
guided in the cladding rather than the core. In addition, the
fiber taper is thinned so much that some non-negligible
20 portion of guided optical power is actually outside the glass
medium. Diameters of this thinned (i.e., tapered) region can
10 be in the range of 1-10 microns.
25

A resonator of appropriate type is then placed between
30 parallel, closely-spaced tapered regions of the two optical
fibers. Optical power (possibly carrying information) that is
15 propagating in one of the optical fibers couples weakly from
the corresponding fiber optic taper to the resonator.
35 However, when the frequency of the optical power is "resonant"
with a mode of the optical resonator there will be, in
general, a significant increase in the power transferred to
40 the resonator and, in turn, to the second fiber taper.
20

An embodiment describes an all fiber-optical device with
substantial advantages.
45

50

55

5

10

15

20

10

25

30

15

35

40

20

45

50

55

Figure 3 and Figure 4 show the system configured to be used as an add/drop filter. The drop function is illustrated in Figure 3 while the add function is illustrated in Figure 4). This figure uses the port designations shown in Figures 1 and 2. The microsphere resonator 300 is placed between two fibers: a first fiber 500 which carries the original optical channels and the modified channels (ports 1 and 2 respectively), and the second fiber 502 which carries the dropped channel (port 3) or the channel to be added (port 4).

Each of the fibers is tapered at the respective neck locations.

Figure 5 shows a high magnification photograph of this embodiment. A 300 micron diameter microsphere resonator 300 is shown between the two fibers 500 and 502. Each of the fibers is 3-5 microns in diameter at the location of the smallest part 501, 503 of the fibers 500, 502. The preferred embodiment in Figure 3 and Figure 4 shows the sphere 300 in actual contact with both neck parts of the fibers. However, certain gaps between the fiber and resonator are possible and may even be preferred, since the optical energy can be transferred by evanescent coupling.

Figure 6 shows the transmission spectra through port #2 and port #3 on the device in Figure 5. The spectra have been generated by scanning the optical frequency of a light wave

5 which is introduced at port #1. The minima and maxima in the
two traces of Figure 6 correspond to resonances of the
10 spherical resonator appearing in the photo in Figure 5.

The preferred resonator is a silica microsphere. Other
5 shapes, sizes and materials could be used for the resonator.
15 The spheres can be distorted - for example prolate or oblate.
A disk-shaped resonator, for example, could be used. Disk
resonators might be simpler in some ways to fabricate and
20 would have a simpler mode spectrum. Disks could also be
10 fabricated using lithographic techniques. Moreover, the sphere
25 or disk could be fabricated using silica or other materials,
including, but not limited to, semiconductors or polymer
materials.

30 The transmission line width or bandwidth of these devices
15 using spheres with diameters in the size range of 200-300
microns and tapers with diameters in the range of 3-5 microns
35 is typically between 20 and 100 MHz. This corresponds to an
optical Q value between 2-10 million. In certain applications,
40 such as in an optical spectrum analyzer, these high Q's and
20 narrow line widths could be very desirable. However, for WDM
45 communications systems in which each optical channel has
GigaHertz data rates, it may be desirable to have wider
bandwidths and hence lower optical Q's. In addition, the
50 typical mode frequency spacing in the microsphere resonator of

5 the prototype devices may be too narrow for use in the WDM
system. For example, in the spectrum of Figure 6, the mode
10 spacing of 1.3 GigaHertz would be too narrow for high data-
bandwidth add/drop applications. Therefore, different
5 features can be modified to increase both the bandwidth
15 associated with the resonant line width as well as the
frequency spacing of the resonator modes.

20 One variation is to intentionally degrade the Q factor of
the resonator by reducing its size. Smaller resonators, for
10 example, have lower Q factors and hence wider line widths.
25 Smaller spherical resonators, with diameters in the range of
30-50 microns, for example, have been tested by the co-
inventors in a system and can provide sufficient bandwidth to
30 drop an information channel carrying 5 Gigabits/sec of pseudo-
15 random data. The line widths of certain resonator modes in
35 these reduced diameter systems are in the range of 10
GigaHertz with corresponding Q's in the range of 20,000.

40 As for the mode frequency spacing there are a number of
different techniques to increase this number from present
20 values. These include using eccentric spheroidal resonators to
45 increase frequency splitting of resonant modes, or using disk-
shaped resonators to eliminate or decrease the azimuthal
degrees of freedom of the spherical optical mode.

50

55

5

10

15

20

25

30

35

40

45

50

An important issue in the use of add/drop filters is loss upon coupling to the second taper as well as loss upon transmission past the resonator. In measurements conducted on the prototype devices, the primary contributions to each of these components is from the fiber tapers themselves. The taper to resonator to taper coupling is measured to be extremely efficient, e.g, loss of 99.8% taper-to-resonator-to-taper coupling has been attained. Consistent with this result, very high extinction of the dropped channel has been observed. Extinctions exceeding 27 dB have been observed. This can be attributed to the high quality of the taper-to-resonator junction (i.e., loss) as well as the nearly identical nature of the two, fiber-taper coupling junctions.

A control mechanism can be used to maintain the wavelength of a particular resonance at or near the wavelength of an optical signal. The feedback control to the sphere could monitor the transmitted power through the possible output ports or even the minute optical power that scatters from the resonator. Feedback could be used to control the optical source emission wavelength or the wavelengths of the resonances of the resonator. Control of wavelength in this process could use temperature or other possibilities described herein.

55

5

The system can also be made tunable. One technique tunes
by changing the temperature of the resonator or disk by
10 directly heating it using electrical or optical means. In the
latter case, a small laser source could be used to heat the
5 resonator.

15

Another technique uses a coating on the sphere or disk,
whose refractive index can be varied by optical or electrical
means. For example, some materials are strongly electro-optic
20 so that an applied electric field will induce a change in
their refractive index. If the sphere or disk is placed
10 between the plates of a small capacitor, then a voltage
25 applied to the capacitor induces tuning of the sphere resonant
frequencies. Possible coatings include but are not limited to
30 selected polymers, liquid crystals, semiconductors, or
15 glasses.

35

If the resonators are made from a material other than
silica, then the material itself could be strongly electro-
optic (silica is weakly electro-optic) so that an applied
40 field changes its refractive index and hence tunes the
resonant frequencies. Semiconductor spheres or disks exhibit a
20 refractive index that varies with carrier density and hence
45 this could also provide a good tuning mechanism.

50

Another embodiment would have the system mounted to a
substrate to improve its strength and durability. For

55

5 example, a substrate could be prepared in which alignment
grooves, holes etc. are prepared using standard lithographic
10 and etching procedures. Fiber tapers and resonators are then
placed into these structures to achieve spatial registration.
5 It can be important for the tapers to be prepared using
15 optical fiber so as to derive the advantages of intrinsic
fiber optic compatibility. It could also be possible to
prepare the resonator as part of the substrate. For example, a
20 disk resonator similar to that described in the Little
10 reference could be defined in a wafer and fiber tapers then
25 mounted to the wafer by way of registration grooves. Use of a
substrate would also make possible the incorporation of
30 electronic control circuits on the same wafer or semiconductor
chip.

15 The preferred embodiment describes fabricating the
resonator using silica. However, other materials are
35 possible, including semiconductors and polymer materials.

Another embodiment shown in Figure 7 places multiple
40 resonators 700-710 between the two fiber tapers 720, 730. The
20 system of Figure 7 shows N microsphere resonators 700-710.
45 Each microsphere is close to or touching a respective fiber
taper 720, 730. Each resonator can have a different resonant
frequency. A more preferred mode is that each of the
50 resonators is tunable independently of the others, using the

5

techniques described above. This embodiment provides a multiple add/drop function in a single device.

10

The Figure 7 system could also be formed on a substrate as described above.

5

15

20

10

25

30

15

35

40

45

50

55

The system described above may have transmission characteristics that depend on the optical wave's input polarization. A polarization independent system is possible when two resonators are configured at 90° relative to one another to independently couple orthogonal polarization states of a particular optical channel. Provided the coupling characteristics of the resonators are nearly the same, the result will be nearly polarization independent. In addition, the spacing between the two 90° oriented resonators should be as close as possible to minimize path-length difference of the two coupled orthogonal states of polarization.

5

10

15

20

10

25

30

35

40

45

50

55

In particular, it is important to note that the channel add/drop function is not the only possible application of this invention. Its ultra-high Q properties give it unique attributes in many fiber-based applications requiring ultra-narrow-band optical filters. This could include, for example, but is not limited to optical spectrum analyzers or narrow-band spectral sampling devices.

Although only a few embodiments have been described in detail above, those having ordinary skill in the art certainly understand that modifications are possible.

Claims

5

10

15

20

25

30

35

40

45

50

55

5

What is claimed is:

10

1. An optical device, comprising:

15

an optical fiber, which has a first thinned portion, formed
such that a fraction of the guided optical power propagates
outside of the first thinned portion; and

20

a resonator, coupled to said first thinned portion, such
that optical power can be transferred to the resonator.

25

2. A device as in claim 1 further comprising a second
optical fiber, having a second thinned portion, and also coupled
to said resonator, such that power can be transferred between the
first fiber and the second fiber.

30

35

3. A device as in claim 2 further comprising a substrate,
having a first area for holding said first thinned portion of
said first optical fiber, a second area for holding said second
thinned portion of said second optical fiber and a third indented
portion for holding said resonator.

40

45

4. A device in claim 3 wherein said resonator is a sphere.

50

55

5

10

5. A device as in claim 3 wherein said resonator is disk-shaped.

15

6. A device as in claim 3 wherein said resonator is spheroid-shaped.

20

7. A device as in claim 3 further comprising an electronic tuning element, formed on said substrate in a proximity of said resonator and energizable to tune a resonant mode of said resonator.

25

30

8. A device as in claim 7 further comprising a control circuit for said electrooptic tuning element, formed in said substrate.

35

9. A device as in claim 8 wherein said tuning element is a resistive heater.

40

45

10. A device as in claim 8 wherein said tuning element includes a laser which heats said resonator.

50

55

5

11. A device as in claim 1 further comprising a tuning
mechanism, which tunes the frequencies of the resonator modes one
of continuously in a repetitive scanning mode, or in discrete
jumps.

15

12. A device as in claim 11 wherein said resonator is tuned
by changing the temperature of the resonator.

20

13. A device as in claim 12 further comprising a resistive
heating element, selectively energizable to increase a
temperature of said resonator to thereby change a resonant
frequency thereof.

30

14. A device as in claim 12 wherein said tuner comprises a
laser for heating said resonator.

35

15. A device as in claim 11 wherein said tuning is carried
out by providing a plurality of additional resonators, each
resonator having a different resonant mode.

45

50

55

5

16. A device as in claim 11 further comprising a feedback
10 element, detecting a power from a specified location in the
optical device, and tuning the resonator based on said power.

15

17. A device as in claim 16 wherein said power that is
detected is reflected power.

20

18. A device as in claim 16 wherein said power that is
detected as transmitted power past the resonator and the
25 resonator is tuned to minimize said transmitted power.

30

19. A device as in claim 2 further comprising means for
reducing a polarization dependence of the system.

35

20. A device as in claim 2 wherein said resonator is
mounted to couple to a first polarization state, and further
comprising a second resonator which is mounted to couple to a
40 second polarization state different than said first polarization
state.

45

50

55

5

21. A device as in claim 20 wherein said second
10 polarization state is orthogonal to said first polarization
state.

15

22. A device as in claim 20 further comprising a tuning
element, enabling a resonant mode of said resonator to be tuned.

20

23. A device as in claim 2 further comprising at least one
additional resonator, also coupled optically to the thinned
25 portion, said at least one additional resonator having at least
one optical characteristic that is different than said resonator.

30

24. A device as in claim 29 wherein said optical
characteristic is a resonant mode frequency.

35

25. A device as in claim 29 wherein said optical
characteristic is a polarization state.

40

26. A fiber optic channel modifying device, comprising:
45 a first optical fiber, carrying a plurality of optical
channels;

50

55

5

10

15

said first optical fiber having a first thinned portion;
a second optical fiber, also having a second thinned
portion; and
a resonator, coupled optically to said first and second
thinned portions.

20

27. A device as in claim 26 wherein said device is used as
channel dropping device, and said resonator is resonant with a
frequency of a channel to be dropped.

25

30

28. A device as in claim 26 wherein said device is to used
as a channel adding device, and said resonator is resonant with a
channel to be added.

35

29. A device as in claim 26 further comprising a plurality
of additional resonator devices, each said resonator device
having a different optical characteristic.

40

45

30. A device as in claim 29 wherein said optical
characteristic is the resonant mode frequency.

50

55

5

10

31. A device as in claim 29 wherein said optical characteristic is a polarization state.

15

32. A device as in claim 26 wherein said resonator is a spherically shaped piece of silica glass.

20

33. A device as in claim 26 further comprising a tuning structure, which operates to tune a resonant mode of said resonator.

25

30

34. A device as in claim 33 further comprising a parameter detector, which detects a parameter related to resonance of the system, and commands the tuning mechanism to adjust a resonant mode of said resonator responsive to said parameter.

35

35. A device as in claim 34 wherein said parameter is power.

40

45

36. A device as in claim 35 wherein said power is transmitted power into the second fiber from the first, and said tuning is carried out to maximize the transmitted power.

50

55

5

37. A device as in claim 35 wherein said power is scattered
resonant power, and said tuning is carried out to maximize the
scattered power.

15

38. A device as in claim 33 wherein said tuning mechanism
includes a device which modifies the temperature of the resonator
to vary its resonant frequencies.

20

39. A device as in claim 33 wherein said tuning mechanism
includes an electrooptic device.

25

40. A device as in claim 26 further comprising at least one
additional resonator.

30

41. A device as in claim 40 wherein said additional
resonator has a different resonant frequency than said resonator.

35

42. A device as in claim 26 further comprising a silicon
substrate, having first and second fiber holding surfaces for
respectively receiving said first and second optical fibers, and
having a resonator holding surface for receiving said resonator.

40

45

50

55

5

10

15

20

25

30

35

40

45

50

55

43. A device as in claim 42 further comprising a silicon substrate, having first and second fiber holding surfaces for respectively receiving said first and second optical fibers, and having a resonator holding surface for receiving said resonator and wherein said temperature controlling mechanism is located in the vicinity of said resonator.

44. A device as in claim 43 further comprising a feedback mechanism, monitoring some parameter indicative of proper resonance, said feedback mechanism integrated into said silicon substrate.

45. A device as in claim 43 further comprising a control circuit for the heating mechanism, said control circuit integrated in said silicon substrate.

46. An optical add/drop filter, comprising:
a resonator, having a resonant mode of operation;
a first optical fiber, in which signals pass from a first end to a second end, the first end including an input signal or signals, and the second end including a first output signal or

5

signals, and a first thinned portion passing adjacent said
10 resonator; and

a second optical fiber, having a second thinned portion
passing adjacent said resonator, and in which signals pass from a
15 first end to a second end, the first end defining an input port
for an add function and the second end defining an output port
for a drop function.
20

47. A filter as in claim 46 wherein said resonator is a
25 silica microsphere.

48. A filter as in claim 46 wherein said resonator is a
30 disk-shaped element.

49. A filter as in claim 46 further comprising at least one
35 additional resonator, said at least one additional resonator
having a resonant wavelength that is different than a resonant
40 wavelength of said resonator.

50. A filter as in claim 46 further comprising a tuning
45 element, operating to tune the resonator's resonant mode
according to a predetermined parameter.
50

55

5

10

56. A filter as in claim 50 wherein said predetermined parameter includes proper synchronization between the resonant mode of the resonator, and the desired channel to be added or

15

dropped.

20

52. A filter as in claim 51 wherein said tuning mechanism is a device which selectively applies heat to said resonator.

25

53. A filter as in claim 51 wherein said tuning mechanism is a device that is electro-optic.

30

54. A filter as in claim 46 further comprising an element which minimizes polarization dependence of said resonator.

35

40

45

50

55

5

55. A fiber coupling device comprising:

10

a first optical fiber, having a thinned portion;

an optical resonator;

15

a substrate, said substrate having a surface with a first notch formed therein adapted to physically contain said thinned portion of said fiber; and first optical a resonator holding portion, located on said surface of said substrate, and positioning said resonator adjacent to said tapered portion of said fiber, such that optical energy is coupled between said resonator and said fiber.

25

30

56. A device as in claim 55 further comprising a second optical fiber with a second thinned portion, and a second notch formed in the surface of said substrate, holding said second thinned portion, thereby forming an add/drop filter which enables adding a channel from said second fiber or dropping a channel to said second fiber.

35

40

45

57. A device as in claim 55 further comprising a control circuit integrated into or onto the substrate, and coupled to its said resonator.

50

55

5

10

58. A device as in claim 51 wherein said control circuit is a tuning circuit for said resonator.

15

20

69. A device as in claim 58 wherein said tuning circuit comprises a selective heating element, located in a vicinity of said resonator to selectively heat said resonator and thereby change the resonant frequency thereof.

25

60. A device as in claim 57 wherein said control circuit is an element which controls some aspect of operation of said resonator.

30

35

61. A device as in claim 57 wherein such control circuit is a feedback controlling device and further comprising a parameter monitor which monitors the parameter indicative of desired condition, said feedback controlling device controlling a tuning of said resonator to maintain said desired condition.

40

45

62. A method of transferring optical signals between optical fibers, comprising:

50

55

5

obtaining a portion of each of first and second optical
10 fibers which have a narrowed portion and a non-narrowed portion;
and

15 placing a resonator near said narrowed portions,
sufficiently close that optical coupling of waves can occur
between said thinned portion and said coupler.

20

63. A method as in claim 62 further comprising adding a
channel by supplying a optical wavelength which is resonant with
25 said resonator into said second fiber to thereby add said optical
channel.

30

64. A method as in claim 63 further comprising dropping an
optical channel.

35

65. A method as in claim 62 further comprising tuning the
resonator.

40

66. A method as in claim 65 wherein said tuning comprises
controlling a temperature of the resonator.

45

50

55

5

67. A method as in claim 65 wherein said tuning uses an
10 electro-optic element.

68. A method as in claim 65 further comprising monitoring a
15 parameter indicative of a desired condition of a system, and
using said parameter as feedback to determine an amount of
20 tuning.

69. A device as in claim 68 wherein said parameter is
25 power.

70. A device as in claim 68 wherein said power is a
30 transmitted power, and said tuning is modified to minimize the
transmitted power.

35

71. A device as in claim 69 wherein said power is scattered
40 circulating resonator power, and wherein said tuning comprises
tuning the resonator to maximize the scattered power.

72. A method as in claim 62 wherein said optical coupling
45 is evanescent coupling.

50

55

5

73. A method as in claim 62 further comprising placing
10 additional resonators having different optical characteristics
than said resonator, into optical contact with said thinned
portion.

15

74. A method as in claim 66 wherein at least one of said
20 additional resonators has a different polarization than said
resonator.

25

75. A method as in claim 66 wherein at least one of said
additional resonators has a different optical mode frequency than
said resonator.

30

76. A method of adding or dropping a channel on an optical
35 fiber comprising:

providing a thinned portion in the optical fiber in which
the channel is to be added or dropped;

40

bringing the thinned portion into an optical coupling with
an optical resonator; and

45

tuning the resonator to a desired frequency for adding or
dropping the channel to thereby add or drop the channel at the
desired tuned frequency.

50

55

5

10

77. A method as in claim 76 wherein said resonator is one which supports whispering gallery modes.

15

78. A device in claim 2 wherein said resonator is spherical in shape.

20

79. A device as in claim 2 wherein said resonator is disk-shaped.

25

80. A device as in claim 2 wherein said resonator is spheroid-shaped.

30

35

81. A device as in claim 2 further comprising a plurality of resonators coupled to the said first and second fibers.

40

82. A device as in claim 2 further comprising a tuning mechanism, which tunes the frequencies of the resonator modes.

45

83. A device as in claim 81 further comprising tuning mechanisms, which tune the frequencies of the resonator modes in each resonator making up said plurality.

50

55

5

10

84. A device as in claim 7 wherein said tuning element includes a laser which heats said resonator.

15

85. A device as in claim 3 further comprising a plurality of resonators coupled to the said first and second fibers.

20

86. A device as in claim 11 wherein said resonator is a sphere.

25

87. A device as in claim 11 wherein said resonator is disk-shaped.

30

88. A device as in claim 11 wherein said resonator is spheroid-shaped.

35

40

89. A device as in claim 16 wherein said power that is detected is transmitted power coupled to the second fiber through the resonator from the first fiber and said transmitted is maximized.

45

50

55

5

10

90. A device as in claim 26 wherein said resonator is a disk shaped. 91. A device as in claim 26 wherein said resonator is spheroid shaped.

15

5

92. A device as in claim 26 wherein said resonator is made of silica glass.

20

93. A filter as in claim 46 wherein said resonator is a spheroid-shaped element.

25

10

94. A filter as in claim 46 wherein said resonator is made of silica.

30

35

15

40

45

50

35

55

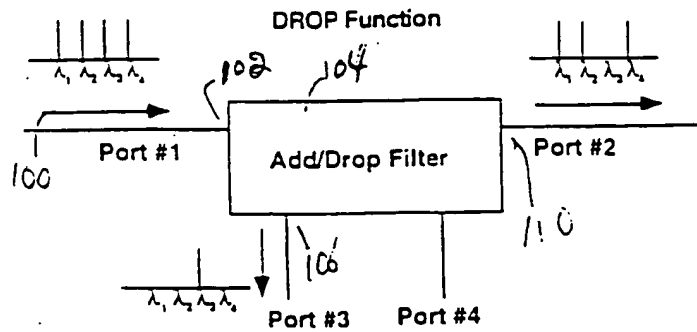


Figure 1A Illustration of the Drop function in an add/drop filter. The channel at wavelength λ_1 is shown being dropped in the schematic.

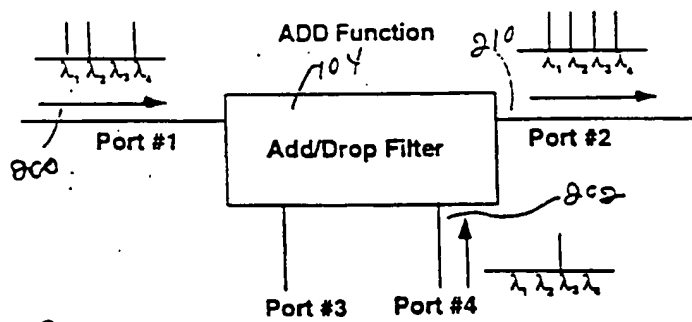


Figure 1B Illustration of the Add function in an add/drop filter. A vacant channel slot at λ_1 is filled by input at port #4.

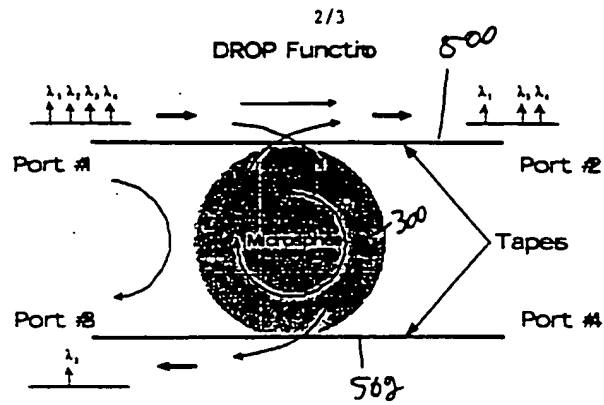


Figure 3. Illustration of the drop function in the present invention.

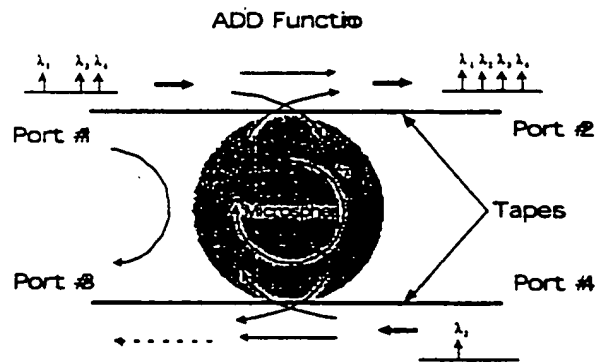


Figure 4. Illustration of the Add function in the present invention.

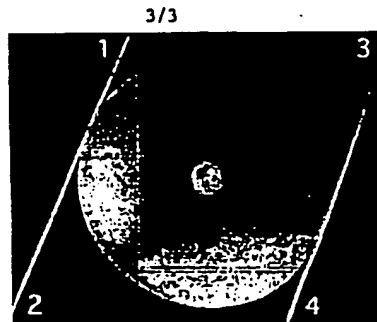


Figure 5. Micrograph showing a 300 micron diameter silica microsphere with two fiber optic tapers attached.

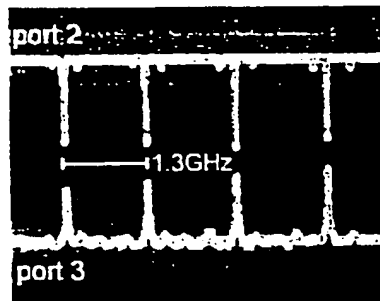


Figure 6. Spectral scans measured at taper ports #2 and #3 when a single frequency tunable laser source is input at port 1 and scanned in this case by approximately 5 GHz. The extinctions of optical power in the upper traces correspond to excitation of whispering gallery modes of the microsphere. These extinctions exceed 23 dB. Correspondingly, the energy that is coupled from the upper taper is transferred to the lower fiber taper with high efficiency. To date we estimate efficiencies better than 99%.

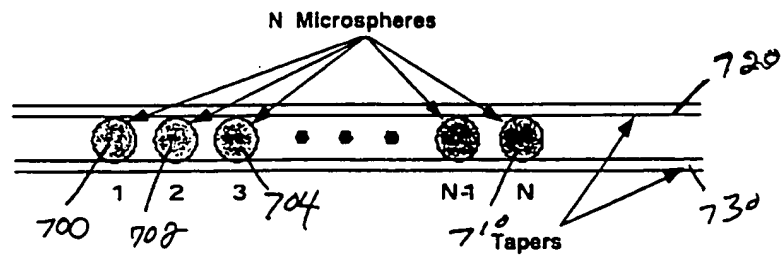


Figure 7. Multi-wavelength add/drop device in which several independently tunable resonators are sandwiched between two fiber tapers.

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US99/26877

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) : G02B 6/26, 6/293; H04J 14/02

US CL : 385/15, 24, 28, 43; 359/127

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 385/11, 15, 24, 27, 28, 30, 39, 42, 43, 50; 359/124, 127

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

None

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

USPTO APS WEST

search terms: resonant, resonator, coupling, waveguide, microS, tapered, thinned

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant in claim No.
A	US 3,589,794 A (MARCATILI) 29 June 1971 (29-06-1971), see entire document, especially Figure 15a, column 6 (lines 20-40), and column 8 (lines 20-39).	1-94
X	US 4,720,160 A (HICKS, JR.) 19 January 1988 (19-01-1988), see entire document, especially column 10 (line 57) to column 14 (line 5).	1-94
X	US 5,506,712 A (SASAYAMA ET AL.) 09 April 1996 (09-04-1996), see entire document, especially Figures 12 & 22, column 9 (lines 41-63) and column 14 (lines 42-67).	1-94



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents

A document defining the general state of the art which is not considered to be of particular relevance

B earlier document published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is used to establish the publication date of another invention or other special reason (as specified)

C document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T

later document published after the international filing date or priority date and which is relevant to the application but cited to understand the principle or theory underlying the invention

X

document of particular relevance, the cited invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y

document of particular relevance, the cited invention cannot be considered to involve an inventive step when the document is considered with one or more other such documents, such combinations being obvious to a person skilled in the art

A

document in member of the same patent family

Date of the actual completion of the international search

07 JANUARY 2000

Date of mailing of the international search report

10 FEB 2000

Name and mailing address of the ISA/US

Commissioner of Patents and Trademarks

Box PCT

Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

JOHN D. LEE

Telephone No. (703) 305-4886

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US99/26877

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5,682,401 A (JOANNOPOULOS ET AL.) 28 October 1997 (28-10-1997), see entire document.	4, 6, 32, 47, 78, 80, 86, 88, 91, 93
X, E	US 6,009,115 A (HO) 28 December 1999 (28-12-1999), see entire document, especially Abstract, column 1 (lines 59-67), column 2 (lines 1-60), and claims 1-23.	1-94
X	LITTLE, B.E. et al. Microring Resonator Channel Dropping Filters. Journal of Lightwave Technology. June 1997 (6-1997). Vol. 15, No. 6, pages 998-1005, especially pages 999 and 1000.	1-94